



## Data centres

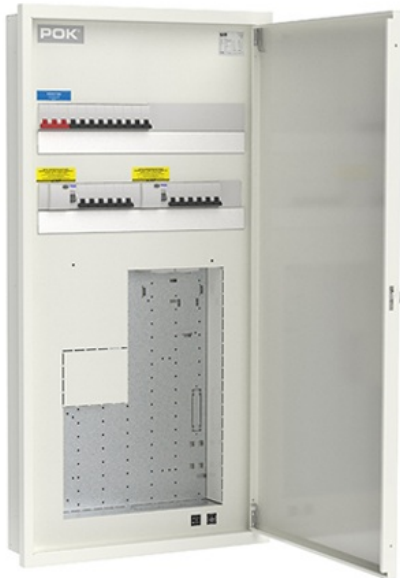

# DATA CENTRES

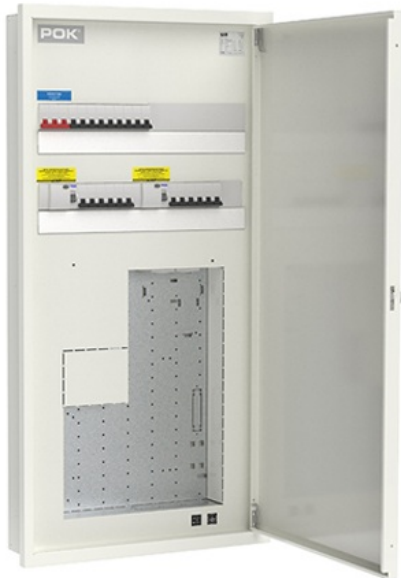

The ITK data group centres are suited to renovation and new construction. The open back enables easy connectivity for cables fed through the bottom. The centre can be installed both vertically and horizontally. For horizontal installation, we recommend an optional door holder kit.

In the ITP data group centres, the IT and electricity distribution spaces are located on top of each other. The side of the centre has a cable chute by the IT space for the wiring of the electricity distribution section. This makes it easy to connect a feed cable from the bottom.

The IT space can be equipped with a wide variety of fittings, which enables several different uses. All data centres are available for both surface and flush mounting.

# DATA CENTRES

| SSTL number | Name  | Product description           | In | Installation |
|-------------|---|-------------------------------|----|--------------|
| 3312418     | Ryhmäkeskus-data pinta FE ITK840P-18J2V     | In25, 2x4P VVSK, 385x850x110  |    |              |
| 3312419     | Ryhmäkeskus-data pinta FE RKS1000P-19J2V-IT | In25, 2x4P VVSK, 270x1000x102 |    |              |
| 3312424     | ITP980U/60, Data group centres              | IT 0,24m2                     |    |              |
| 3312425     | ITP980U/60, Data group centres              | IT 0,24m2                     |    |              |



## Product info

The ITK data group centres are suited to renovation and new construction. The open back enables easy connectivity for cables fed through the bottom. The centre can be installed both vertically and horizontally. For horizontal installation, we recommend an optional door holder kit (only for a right-hand door). The IT space can be equipped with a wide variety of fittings, which enable several different uses. Available for both surface and flush mounting.

## Technical details

|                   |         |                    |                                    |
|-------------------|---------|--------------------|------------------------------------|
| Electrical number | 3312418 | Main switch (A)    | 40                                 |
| Ue (V)            | 230/400 | Breaker 1-pole C10 | 9                                  |
| In (A)            | 25      | Breaker 1-pole C16 | 9                                  |
| IP                | 20      | Reserved (mod)     | 7                                  |
| fn                |         | RJ -connector      | 12x(15*20),10x(17*18),12x(15*19,5) |
| Icw               | <5kA    | Installation       | Surface                            |
| Material          | Cu-Zn   | Väri               | RAL9010                            |





### Technical details

|                   |         |                    |                              |
|-------------------|---------|--------------------|------------------------------|
| Electrical number | 3312419 | Main switch (A)    | 40                           |
| Ue (V)            | 230/400 | Breaker 1-pole C10 | 9                            |
| In (A)            | 25      | Breaker 1-pole C16 | 10                           |
| IP                | 20C     | Reserved (mod)     | 7                            |
| fn                |         | RJ -connector      | 12x(17*18) +<br>14x(15*19,5) |
| Icw               | <5kA    | Installation       | Surface                      |
| Material          | Cu-Zn   | Väri               | RAL9016                      |





## Product info

In the ITP data group centres, the IT and electricity distribution spaces are located on top of each other. The side of the centre has a cable chute by the IT space for the wiring of the electricity distribution section. This makes it easy to connect a feed cable from the bottom. The IT space can be equipped with a wide variety of fittings, which enable several different uses. Available for both surface and flush mounting. The surface-mounted model contains the necessary feed-through flanges and a fixed back plate. When flush-mounted, the centre only rises 4mm above the wall surface!

## Technical details

|                    |         |                    |                              |
|--------------------|---------|--------------------|------------------------------|
| Electrical number  | 3312424 | Breaker 1-pole B16 | -                            |
| Ue (V)             | 230/400 | Breaker 1-pole C16 | 12                           |
| In (A)             | 25      | Breaker 1-pole C20 | -                            |
| IP                 | 20C     | Breaker 3-pole C16 | -                            |
| fn                 |         |                    | -                            |
| Icw                | <5kA    |                    | -                            |
| Material           | Ku-Si   | Reserved (mod)     | 9                            |
| Main switch (A)    | 40      | RJ -connector      | 12x(17*18) +<br>14x(15*19,5) |
| Breaker 1-pole C6  | -       | Installation       | Uppo tai pinta               |
| Breaker 1-pole B10 | -       | Väri               | RAL9010                      |
| Breaker 1-pole C10 | 9       |                    |                              |





## Product info

In the ITP data group centres, the IT and electricity distribution spaces are located on top of each other. The side of the centre has a cable chute by the IT space for the wiring of the electricity distribution section. This makes it easy to connect a feed cable from the bottom. The IT space can be equipped with a wide variety of fittings, which enable several different uses. Available for both surface and flush mounting. The surface-mounted model contains the necessary feed-through flanges and a fixed back plate. When flush-mounted, the centre only rises 4mm above the wall surface!

## Technical details

|                    |         |                    |                              |
|--------------------|---------|--------------------|------------------------------|
| Electrical number  | 3312425 | Breaker 1-pole B16 | 6                            |
| Ue (V)             | 230/400 | Breaker 1-pole C16 | 12                           |
| In (A)             | 50      | Breaker 1-pole C20 | -                            |
| IP                 | 20C     | Breaker 3-pole C16 | -                            |
| fn                 |         |                    | -                            |
| Icw                | <5kA    |                    | -                            |
| Material           | Ku-Si   | Reserved (mod)     | 21                           |
| Main switch (A)    | 63      | RJ -connector      | 18x(17*18) +<br>22x(15*19,5) |
| Breaker 1-pole C6  | -       | Installation       | Pinta / Uppo                 |
| Breaker 1-pole B10 | 6       | Väri               | RAL9010                      |
| Breaker 1-pole C10 | 12      |                    |                              |

